


NEW IN OUR RANGE OF PRODUCTS: DRUM DRIVES

Features and advantages of our drum drives:

- Gearless, low-noise and maintenance-free
- Patented design
- Space-saving thanks to rope guiding directly on the rotating drive cylinder
- Velocities up to 0.63 m/s can be realised
- Pulley groove configuration can be selected individually

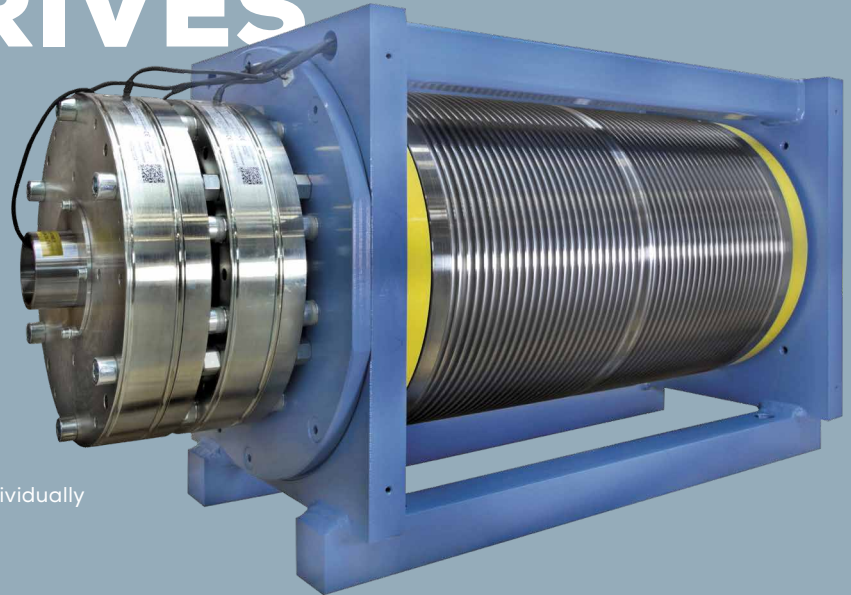

Type	Diameter of the rotating drive cylinder	Axle load	Motor weight	Max. motor torque	Rope diameter	Suspension	Max. weight of lifted load	Lifting height
Z 185 S	180.0 mm	15 kN	110 kg	250 Nm	6 mm	1:1	270 kg	9.0 m
						2:1	540 kg	4.5 m
Z 244 S	240.0 mm	30 kN	185 kg	400 Nm	6 mm	1:1	330 kg	13.5 m
						2:1	680 kg	6.5 m
Z 246 S	240.0 mm	30 kN	220 kg	600 Nm	6 mm	1:1	500 kg	15.0 m
						2:1	1,000 kg	7.5 m
Z 248 S	240.0 mm	30 kN	262 kg	800 Nm	6 mm	1:1	650 kg	22.5 m
						2:1	1,250 kg	11.0 m
Z 324 S	320.0 mm	40 kN	336 kg	600 Nm	8 mm	1:1	350 kg	12.0 m
						2:1	740 kg	6.0 m
Z 326 S	320.0 mm	40 kN	370 kg	900 Nm	8 mm	1:1	550 kg	16.0 m
						2:1	1,100 kg	8.0 m
Z 328 S	320.0 mm	40 kN	450 kg	1200 Nm	8 mm	1:1	740 kg	20.0 m
						2:1	1,480 kg	10.0 m
Z 424 S	402.5 mm	75 kN	370 kg	960 Nm	10 mm	1:1	470 kg	13.5 m
						2:1	940 kg	6.5 m
Z 426 S	402.5 mm	75 kN	550 kg	1440 Nm	10 mm	1:1	650 kg	17.5 m
						2:1	1,300 kg	8.5 m
Z 428 S	402.5 mm	75 kN	725 kg	1920 Nm	10 mm	1:1	930 kg	22.5 m
						2:1	1,800 kg	11.0 m